


FieldMaster™ Ion Guides/Drift Tubes

BURLE

SEP/05

- Robust
- Single Piece Construction
- Nichrome, Copper and Gold Electrodes Available
- Wide Variety of Shapes and Sizes: Tubes, Sheets, Washers, Custom Shapes
- Uniform Resistance Variable Over 5 Orders of Magnitude
- Produce Smooth Electric Fields
- Operating Range -20 to 400°C

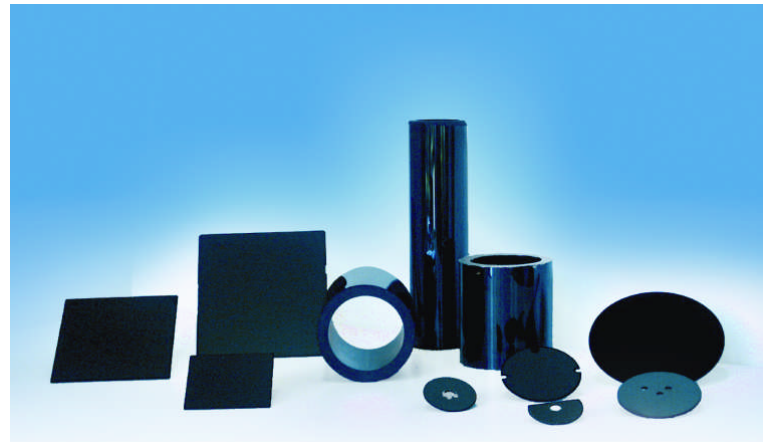

Typical Mechanical and Electrical Characteristics

BURLE FieldMaster™ Ion Guides/Drift Tubes offer a unique capability for analytical instrument designers and manufacturers. These devices are composed of a proprietary lead silicate glass that has been doped to produce a resistive surface. The products can be provided with one or more resistive areas.

The resistivity can be varied over several orders of magnitude in order to optimize current flow and electric field strength. These products are patent pending.

Tube ends parallel typically within 0.025mm (.001")

Sheets are flat within 3 fringes

For higher resistance glass (10^8 to 10^{11} Ω):

Expansion Coefficient (25–450°C): $78 \times 10^{-7} / ^\circ\text{C}$

Softening Point: 642°C

For lower resistance glass (10^6 to 10^8 Ω):

Expansion Coefficient (25–450°C): $82 \times 10^{-7} / ^\circ\text{C}$

Softening Point: 613°C

Temp. Coefficient of Resistivity: $\sim -0.8\% / ^\circ\text{C}$

Tube lengths up to 200mm (8.0") standard

Sheet size up to 102x102mm (4.0"x4.0")

Resistive washers up to 71mm (2.8") dia.

Custom shapes available

Mechanical Interfaces: Flanges, Grids and


Meshes are available.

Inside Diameter (Nom.)	Outside Diameter	Wall Thickness	Resistance Range
60.58mm 2.385"	72.26mm 2.845"	5.84mm 0.230"	10^6 - 10^{11} Ω
48.26mm 1.900"	63.50mm 2.500"	7.62mm 0.300"	10^6 - 10^{11} Ω
39.38mm 1.550"	47.00mm 1.850"	3.81mm 0.150"	10^6 - 10^{11} Ω
30.74mm 1.210"	41.40mm 1.630"	5.33mm 0.210"	10^6 - 10^{11} Ω
24.39mm 0.960"	31.75mm 1.250"	3.68mm 0.145"	10^6 - 10^{11} Ω
0.94mm 0.037"	6.10mm 0.240"	2.57mm 0.102"	10^6 - 10^{11} Ω
1.00mm 0.039"	3.05mm 0.120"	1.03mm 0.041"	10^6 - 10^{11} Ω
1.00mm 0.039"	2.06mm 0.081"	0.53mm 0.021"	10^6 - 10^{11} Ω




Typical Applications:


- Reflectron Lenses
- Drift Tubes for Ion Mobility Spectrometers (IMS)
- Ion Guides
- Ion Mirrors
- Conversion Dynodes
- Voltage Dividers



Reflectron Lens

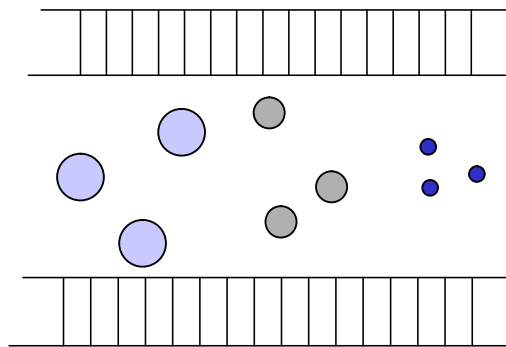

Ion Guide



Voltage Divider

The information furnished is believed to be accurate and reliable, but is not guaranteed and is subject to change without notice. No liability is assumed by BURLE INDUSTRIES for its use. Performance data represents typical characteristics and not specifications as actual, individual product performance may vary. Customers should verify that they have the most current BURLE product information before placing orders, and should independently test and evaluate BURLE products for their intended use. No claims or warranties are made as to the application of BURLE products or their suitability or fitness for any particular purpose. This document may not be reproduced, in whole or in part, without the prior written consent of BURLE INDUSTRIES.

Copyright 2005 by BURLE Technologies, Inc. All rights reserved.

BURLE® and BURLE INDUSTRIES® are registered trademarks of BURLE Technologies, Inc. Marca(s) Registrada(s). Printed in the U.S.A.

For additional information in the U.S.A. and Canada, telephone +1-800-648-1800 and for international calls, use +1-508-347-4000, or FAX request to +1-508-347-3849. BURLE Electro-Optics, Inc., Sturbridge Business Park, P.O. Box 1159, Sturbridge, MA 01566-1159 USA